


# THE LINUX COMMAND LINE

# A COMPLETE INTRODUCTION

## **WILLIAM E. SHOTTS, JR.**

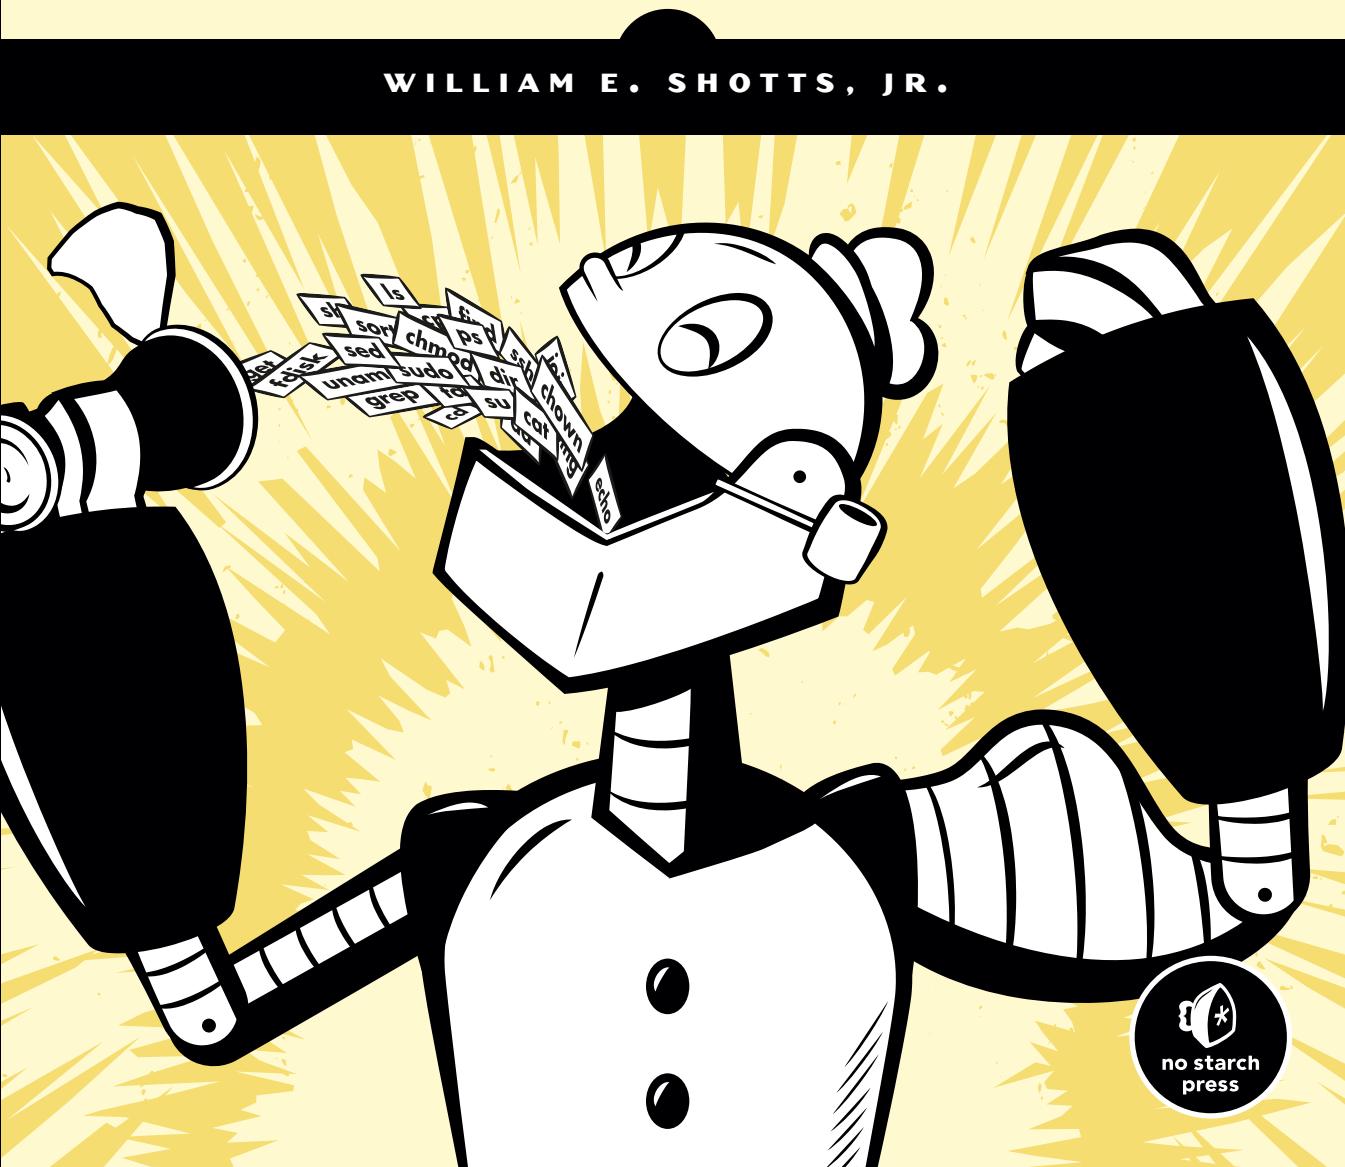

# INDEX

## Symbols

- help option, 42
- \$\*, 386
- \$@, 386
- \${!array[\*]}, 420
- \${!array[@]}, 420
- \${!prefix\*}, 402
- \${!prefix@}, 402
- \${#parameter}, 402
- \${parameter:=word}, 400
- \${parameter:-word}, 400
- \${parameter:+word}, 401
- \${parameter:?word}, 401
- \${parameter//pattern/string}, 403
- \${parameter/#pattern/string}, 403
- \${parameter/%pattern/string}, 403
- \${parameter/pattern/string}, 403
- \${parameter##pattern}, 403
- \${parameter#pattern}, 403
- \${parameter%%pattern}, 403
- \${parameter%pattern}, 403
- \$!, 430
- \$# , 382
- \$((expression)), 404
- \$o, 385
- ./configure, 302
- .bash\_history, 73
- .bash\_login, 113
- .bash\_profile, 112
- .bashrc, 113, 115, 312, 332, 385
- .profile, 113
- .ssh/known\_hosts, 184
- /, 19
- /bin, 19
- /boot, 19
- /boot/grub/grub.conf, 19
- /boot/vmlinuz, 19
- /dev, 20
- /dev/cdrom, 165
- /dev/dvd, 165
- /dev/floppy, 165
- /dev/null, 52
- /etc, 20
- /etc/bash.bashrc, 113
- /etc/crontab, 20
- /etc/fstab, 20, 160, 170
- /etc/group, 79
- /etc/passwd, 20, 79, 241, 245, 352
- /etc/profile, 112, 114
- /etc/shadow, 79
- /etc/sudoers, 87
- /lib, 20
- /lost+found, 20
- /media, 20
- /mnt, 20
- /opt, 20
- /proc, 21
- /root, 21, 88
- /sbin, 21
- /tmp, 21, 429
- /usr, 21
- /usr/bin, 21
- /usr/lib, 21
- /usr/local, 21
- /usr/local/bin, 21, 307, 312
- /usr/local/sbin, 312
- /usr/sbin, 21

*/usr/share*, 21  
*/usr/share/dict*, 219  
*/usr/share/doc*, 21, 45  
*/var*, 22  
*/var/log*, 22  
*/var/log/messages*, 22, 57, 166  
( ( ) compound command, 404, 409  
[ command, 365

## A

a2ps command, 292  
absolute pathnames, 9  
alias command, 46, 111  
aliases, 40, 46, 110  
American National Standards Institute (ANSI), 142  
American Standard Code for Information Interchange.  
    *See* ASCII  
anchors, 219  
anonymous FTP servers, 179  
ANSI (American National Standards Institute), 142  
ANSI escape codes, 143  
ANSI.SYS, 142  
Apache web server, 104  
apropos command, 43  
apt-cache command, 152  
apt-get command, 152  
aptitude command, 152  
archiving, 205  
arithmetic expansion, 62, 65–66, 321, 399, 404  
arithmetic expressions, 62, 396, 404, 406, 416  
arithmetic operators, 62, 405  
arithmetic truth tests, 342, 404  
arrays  
    appending values to the end, 420  
    assigning values, 416  
    creating, 416  
    deleting, 421  
    determining number of elements, 419  
    finding used subscripts, 420  
    index, 416

multidimensional, 416  
reading variables into, 348  
sorting, 420  
subscript, 416  
two-dimensional, 415  
ASCII (American Standard Code for Information Exchange), 17, 68, 71, 198, 222, 292  
bell character, 140  
carriage return, 236  
collation order, 222, 224, 339  
control codes, 68, 222, 286  
groff output driver, 280  
linefeed character, 236  
null character, 198  
printable characters, 222  
text, 17  
aspell command, 263  
assembler, 298  
assembly language, 298  
assignment operators, 407  
asynchronous execution, 429  
audio CDs, 163, 172  
AWK programming language, 263, 412

## B

back references, 232, 260  
backslash escape sequences, 68  
backslash-escaped special characters, 140  
backups, incremental, 208  
basename command, 385  
bash (shell) 3, 110  
    man page, 44  
basic regular expressions, 224, 231, 257, 260, 269  
bc command, 412  
Berkeley Software Distribution (BSD), 290  
bg command, 102  
binary, 81–82, 85, 298, 405  
bit mask, 84  
bit operators, 409  
Bourne, Steve, 3  
brace expansion, 63, 65, 394

branching, 333  
`break` command, 360, 389  
broken links, 37  
BSD (Berkeley Software Distribution), 290  
BSD-style behavior, 98  
buffering, 164  
bugs, 369–373  
build environment, 302  
`bzip2` command, 204

**C**

C programming language, 298, 396, 407, 410  
C++ programming language, 298  
`cal` command, 5  
`cancel` command, 296  
carriage return, 17, 68, 140, 222–223, 235, 262, 289  
`case` compound command, 376  
`cat` command, 53, 235  
`cd` command, 9–10  
`cdrecord` command, 172  
CD-ROMs, 162–163, 172  
`cdrtools` package, 172  
character classes, 26–27, 220–224, 227, 255, 262  
character ranges, 27, 220–221, 262  
`chgrp` command, 91  
child process, 96  
`chmod` command, 81, 92, 311  
`chown` command, 90, 92  
chronological sorting, 241  
cleartext, 179, 182  
client-server architecture, 431  
COBOL programming language, 298  
collation order, 111, 222, 224, 254, 339  
ASCII, 224, 339  
dictionary, 222  
    traditional, 224  
`comm` command, 249  
command history, 4, 73  
command line  
    arguments, 382  
    editing, 4, 70  
expansion, 59  
history, 4, 74  
interfaces, 26, 28  
command options, 14  
command substitution, 64–65, 394  
commands  
    arguments, 14, 382  
    determining type, 40  
    documentation, 41  
    executable program files, 40, 299  
    executing as another user, 87  
    long options, 14  
    options, 14  
comments, 114, 118, 262, 310, 371  
Common Unix Printing System (CUPS), 288  
comparison operators, 409  
compiling, 298  
completions, 72  
compound commands  
    `(( ))`, 342, 354, 404  
    `[[ ]]`, 341, 354  
    `case`, 376  
    `for`, 393  
    `if`, 334  
    `until`, 361  
    `while`, 358  
compression algorithms, 202  
conditional expressions, 366  
configuration files, 17, 20, 109  
`configure` command, 302  
constants, 319  
`continue` command, 360  
control characters, 141, 235  
control codes, 68, 222  
control operators  
    `&&`, 345, 354  
    `||`, 345  
controlling terminal, 96  
*COPYING* (documentation file), 301  
copying and pasting  
    on the command line, 70  
    in `vim`, 129  
    with X Window System, 5  
`coreutils` package, 42, 44–45, 246  
counting words in a file, 55

**cp** command, 28, 33, 116, 185  
**CPU**, 95, 298  
cron job, 189  
crossword puzzles, 219  
**csplit** command, 266  
CUPS (Common Unix Printing System), 288  
current working directory, 8  
cursor movement, 70  
**cut** command, 243, 403

**D**

daemon programs, 96, 104  
data compression, 202  
data redundancy, 202  
data validation, 341  
**date** command, 5  
date formats, 241  
**dd** command, 171  
Debian, 150  
debugging, 330, 370  
defensive programming, 367, 370  
delimiters, 66, 239, 241  
dependencies, 151, 305  
design, 368, 370  
device drivers, 156, 298  
device names, 164  
device nodes, 20  
**df** command, 6, 331  
DHCP (Dynamic Host Configuration Protocol), 178  
diction program, 300  
dictionary collation order, 222  
**diff** command, 250  
Digital Rights Management (DRM), 151  
directories  
    archiving, 205  
    changing, 9  
    copying, 28  
    creating, 28, 33  
    current working, 8  
    deleting, 31, 37  
    hierarchical, 7  
    home, 20, 79, 332  
    listing, 13

moving, 30, 35  
navigating, 7  
**OLD\_PWD** variable, 111  
parent, 8  
**PATH** variable, 111  
**PWD** variable, 112  
removing, 31, 37  
renaming, 30, 35  
root, 7  
shared, 91  
sticky bit, 86  
synchronizing, 211  
transferring over a network, 211  
viewing contents, 8

disk partitions, 161  
**DISPLAY** variable, 111  
Dolphin, 28  
**dos2unix** command, 236  
double quotes, 65  
**dpkg** command, 152  
DRM (Digital Rights Management), 151  
**du** command, 238, 332  
Dynamic Host Configuration Protocol (DHCP), 178

**E**

**echo** command, 60, 111, 316  
    -e option, 68  
    -n option, 349  
edge and corner cases, 370  
**EDITOR** variable, 111  
effective group ID, 86  
effective user ID, 86, 96  
**elif** statement, 339  
email, 234  
embedded systems, 298  
empty variables, 400  
encrypted tunnels, 185  
encryption, 255  
endless loop, 361  
end-of-file, 54, 322  
**enscript** command, 294  
environment, 88, 109, 353  
    aliases, 110  
    establishing, 112

examining, 110  
login shell, 112  
shell functions, 110  
shell variables, 110  
startup files, 112  
subshells, 424  
variables, 110  
**eqn** command, 279  
executable programs, 40, 299, 303  
    determining location, 41  
    PATH variable, 111  
**exit** command, 6, 338, 356  
exit status, 334, 338  
**expand** command, 246  
expansions, 59  
    arithmetic, 62, 65–66, 321,  
        399, 404  
    brace, 63, 65, 394  
    command substitution,  
        64–65, 394  
    delimiters, 66  
    errors resulting from, 365  
    history, 74–76  
    parameter, 64, 65–66, 319,  
        323, 399  
    pathname, 60, 65, 394  
    tilde, 61, 65  
    word splitting, 65  
expressions  
    arithmetic, 62, 396, 404, 406, 416  
    conditional, 366  
**ext3** filesystem, 169  
extended regular expressions, 224  
**Extensible Markup Language**  
    (XML), 234

**F**

**false** command, 335  
**fdformat** command, 171  
**fdisk** command, 167  
**fg** command, 102  
**FIFO** (first-in, first-out), 431  
**file** command, 16  
file descriptor, 51  
**File Transfer Protocol (FTP)**, 179  
filenames, 198  
    case sensitive, 11  
    embedded spaces in, 11, 232  
    extensions, 11  
    hidden, 11  
files  
    access, 78  
    archiving, 205, 209  
    attributes, 79  
    block special, 80  
    block special device, 190  
    changing file mode, 81  
    changing owner and group  
        owner, 90  
    character special, 80  
    character special device, 190  
    compression, 202  
    configuration, 17, 109, 234  
    copying, 28, 33  
    copying over a network, 179  
    creating empty, 51  
    *.deb*, 150  
    deleting, 31, 37, 195  
    determining contents, 16  
    device nodes, 20  
    execution access, 79  
    expressions, 336, 338, 340  
    finding, 187  
    hidden, 11  
    ISO image, 172–173  
    listing, 8, 13  
    mode, 79  
    moving, 30, 34  
    owner, 81  
    permissions, 78  
    read access, 79  
    regular, 190  
    removing, 31, 37  
    renaming, 30, 34–35  
    *.rpm*, 150  
    shared library, 20  
    startup, 112  
    sticky bit, 86  
    symbolic links, 190  
    synchronizing, 211  
    temporary, 428

- files (*continued*)  
text, 17  
transferring over a network, 179, 209, 211  
truncating, 51  
type, 79  
viewing contents, 17  
write access, 79  
filesystem corruption, 164  
filters, 55  
`find` command, 189, 208  
firewalls, 176  
first-in, first-out (FIFO), 431  
floppy disks, 159, 165, 171  
flow control  
branching, 333  
`case` compound command, 376  
`elif` statement, 339  
endless loop, 361  
`for` compound command, 393  
`for` loop, 393  
function statement, 327  
`if` compound command, 334  
looping, 357  
menu-driven, 355  
multiple-choice decisions, 375  
reading files with `while` and `until`  
loops, 362  
terminating a loop, 360  
traps, 427  
`until` loop, 361  
while loop, 359  
`fmt` command, 271  
focus policy, 5  
`fold` command, 271  
`for` compound command, 393  
`for` loop, 393  
Foresight, 150  
Fortran programming language,  
298, 395  
`free` command, 6, 164  
Free Software Foundation, xxix  
`fsck` command, 170  
FTP (File Transfer Protocol), 179  
`ftp` command, 179, 186, 300, 323  
FTP servers, 179, 323
- FUNCNAME variable, 385  
function statement, 327
- G**
- `gcc` (compiler), 299  
`gedit` command, 101, 115  
`genisoimage` command, 172  
Gentoo, 150  
Ghostscript, 288  
`gid` (primary group ID), 78  
global variables, 328  
globbing, 26  
GNOME, 3, 28, 38, 84, 115, 186  
`gnome-terminal`, 3  
GNU `binutils` package, 395  
GNU C Compiler, 299  
GNU `coreutils` package, 42,  
44–45, 246  
GNU Project, 14, 29, 300–301  
`info` command, 44–45  
GNU/Linux, 29  
graphical user interface (GUI), xxvi,  
5, 28, 38, 70, 84, 112  
`grep` command, 56, 216, 352  
`groff` command, 279  
group commands, 423  
groups, 78  
effective group ID, 86  
primary group ID, 78  
GUI (graphical user interface), xxvi,  
5, 28, 38, 70, 84, 112  
`gunzip` command, 202  
`gzip` command, 45, 202
- H**
- hard disks, 159  
hard links, 23, 32, 35  
creating, 35  
listing, 36  
head command, 56  
header files, 302  
“hello world” program, 310  
`help` command, 41  
here documents, 321

- here strings, 353  
hexadecimal, 82, 405  
hidden files, 11, 61  
hierarchical directory structure, 7  
high-level programming  
    languages, 298  
history  
    expansion, 74–76  
    searching, 74  
history command, 74  
home directories, 8, 10, 20, 61,  
    88, 111  
    `/etc/passwd`, 79  
    root account, 21  
HOME variable, 111  
hostname, 140  
HTML (Hypertext Markup  
    Language), 234, 263, 279,  
    315, 326
- I**
- `id` command, 78  
IDE, 165  
`if` compound command, 114,  
    365, 375  
IFS (Internal Field Separator)  
    variable, 351  
IMCP ECHO\_REQUEST, 176  
incremental backups, 208  
info files, 45  
init program, 96  
init scripts, 96  
inodes, 36  
`INSTALL` (documentation file), 301  
installation wizard, 150  
integers  
    arithmetic, 62, 411  
    division, 62, 405  
interactivity, 347  
Internal Field Separator (IFS)  
    variable, 351  
interpreted languages, 299  
interpreted programs, 299  
interpreter, 299
- I/O redirection, 49. *See also*  
    redirection  
ISO images, 172–173  
iso9660 (device type), 162, 173
- J**
- job control, 101  
job numbers, 101  
jobspec, 102  
`join` command, 247  
Joliet extensions, 173  
Joy, Bill, 122
- K**
- `kate` command, 115  
KDE, 3, 28, 38, 84, 115, 186  
kedit command, 115  
kernel, xxv, xxix, 19, 43, 95, 104, 157,  
    165, 253, 305  
    device drivers, 156  
key fields, 239  
`kill` command, 103  
`killall` command, 106  
killing text, 70  
Knuth, Donald, 279  
Konqueror, 28, 84, 186  
konsole (terminal emulator), 3  
`kwrite` command, 101, 115
- L**
- LANG variable, 111, 222, 224  
`less` command, 17, 55, 211, 231  
`lftp` command, 181  
libraries, 299  
line editors, 122  
line-continuation character, 262, 313  
linker (program), 299  
linking (process), 298  
links  
    broken, 37  
    creating, 32  
    hard, 23, 32  
    symbolic, 22, 33

Linux community, 149  
Linux distributions, 149  
    CentOS, 150, 294  
    Debian, 150, 297  
    Fedora, xxviii, 79, 150, 294  
    Foresight, 150  
    Gentoo, 150  
    Linspire, 150  
    Mandriva, 150  
    OpenSUSE, xxviii, 150  
    packaging systems, 149  
    PCLinuxOS, 150  
    Red Hat Enterprise Linux, 150  
    Slackware, 150  
    Ubuntu, xxviii, 149–150, 294  
    Xandros, 150  
Linux Filesystem Hierarchy Standard, 19, 312  
Linux kernel, xxv, xxix, 19, 43, 95, 104, 157, 165, 253, 305  
    device drivers, 156  
literal characters, 218  
ln command, 32, 35  
local variables, 329  
locale, 222, 224, 254, 339  
locale command, 224  
localhost, 182  
locate command, 188, 230  
logical errors, 366  
logical operators, 192–193, 343  
logical relationships, 192, 195  
logical volume manager (LVM), 159, 162  
login prompt, 6, 180  
login shell, 79, 88, 112  
long options, 14  
loopback interface, 178  
looping, 357  
loops, 367, 406, 408, 422, 425  
lossless compression, 202  
lossy compression, 202  
lp command, 291  
lpq command, 295  
lpr command, 290  
lprm command, 296  
lpstat command, 294  
ls command, 8, 13  
    long format, 15  
    viewing file attributes, 79  
Lukyanov, Alexander, 181  
LVM (logical volume manager), 159, 162

## M

machine language, 298  
maintenance, 312, 316, 318, 325  
make command, 303  
*Makefile*, 303  
man command, 42  
man pages, 42, 280  
markup languages, 234, 279  
memory  
    assigned to each process, 96

## N

named pipes, 430  
`nano` command, 122  
Nautilus, 28, 84, 186  
`netstat` command, 178  
networking, 175  
    anonymous FTP servers, 179  
    default route, 179  
    Dynamic Host Configuration  
        Protocol (DHCP), 178  
    encrypted tunnels, 185  
    examining network settings and  
        statistics, 178  
    File Transfer Protocol (FTP), 179  
    firewalls, 176  
    local area network (LAN), 179  
    loopback interface, 178  
    man-in-the-middle attacks, 182  
    routers, 178  
    secure communication with  
        remote hosts, 182  
    testing whether a host is alive, 176  
    tracing the route to a host, 177  
    transferring files, 211  
    transporting files, 179  
        virtual private network, 185  
newline characters, 66, 140  
`NEWS` (documentation file), 301  
`nl` command, 268  
`nroff` command, 279  
null character, 198  
number bases, 405

## O

octal, 82, 405, 418  
`Ogg Vorbis` files, 91  
`OLD_PWD` variable, 111  
OpenOffice.org Writer, 17  
OpenSSH, 182  
operators  
    arithmetic, 62, 405  
    assignment, 407  
    binary, 366  
    comparison, 409  
    ternary, 410  
owning files, 78

## P

package files, 150  
package maintainers, 151  
package management, 149  
    Debian style (*.deb*), 150  
    finding packages, 152  
    high-level tools, 152  
    installing packages, 153  
    low-level tools, 152  
    package repositories, 151  
    Red Hat style (*.rpm*), 150  
    removing packages, 154  
    updating packages, 154  
packaging systems, 149  
page-description language, 234,  
    281, 287  
`PAGER` variable, 111  
pagers, 18  
parameter expansion, 64, 65–66,  
    319, 323, 399  
parent process, 96  
`passwd` command, 93  
passwords, 93  
`paste` command, 246  
PATA hard drives, 165  
`patch` command, 253  
patches, 250  
`PATH` variable, 111, 114, 311, 327  
pathname expansion, 60, 65, 394  
pathnames, 230  
    absolute, 9  
    completion, 72  
    relative, 9  
PDF (Portable Document Format),  
    281, 290  
Perl programming language, 40, 216,  
    263, 299, 412  
permissions, 310  
PHP programming language, 299  
`ping` command, 176  
pipelines, 54, 353, 425  
    in command substitution, 64  
portability, 304, 332, 345  
Portable Document Format (PDF),  
    281, 292

Portable Operating System Interface (POSIX). *See* POSIX  
(Portable Operation System Interface)

positional parameters, 381, 400–402

POSIX (Portable Operating System Interface), 222,  
224–225, 345

character classes, 26, 221,  
223–224, 227, 255, 262

PostScript, 234, 280, 287, 292

pr command, 274, 288

primary group ID (gid), 78

printable characters, 222

printenv command, 64, 110

printers, 164

- buffering output, 164
- control codes, 286
- daisy-wheel, 286
- device names, 165
- drivers, 288
- graphical, 287
- impact, 286
- laser, 287

printf command, 275, 398

printing

- determining system status, 294
- history of, 286
- Internet Printing Protocol, 295
- monospaced fonts, 286
- preparing text, 288
- pretty, 292
- proportional fonts, 287
- queues, 294, 295–296
- spooling, 294
- terminating print jobs, 296
- viewing jobs, 295

process ID, 96

process substitution, 425

processes, 95

- background, 101
- child, 96
- controlling, 100
- foreground, 101
- interrupting, 101
- job control, 101
- killing, 103

nice, 97

parent, 96

process ID, 96

SIGINT, 427

signals, 103

SIGTERM, 427

sleeping, 97

state, 97

stopping, 102

viewing, 96, 98

zombie, 97

production use, 368

programmable completion, 73

ps command, 96

PS1 variable, 112, 140

PS2 variable, 317

ps2pdf command, 281

PS4 variable, 372

pseudocode, 333, 358

pstree command, 106

PuTTY, 186

pwd command, 8

PWD variable, 112

Python programming language, 299

## Q

quoting, 65

- double quotes, 65
- escape character, 67
- missing quote, 364
- single quotes, 67

## R

RAID (redundant array of independent disks), 159

raster image processor (RIP), 288

read command, 348–351, 362,  
368, 425

Readline, 70

README (documentation file),  
45, 301

redirection

- blocked pipe, 431
- group commands and  
subshells, 424

here documents, 321  
here strings, 353  
standard error, 51  
standard input, 53, 323  
standard output, 50  
redirection operators  
    `&`, 52  
    `>`, 50  
    `>>`, 51  
    `>(list)`, 425  
    `<`, 54  
    `<<`, 322–323  
    `<<-`, 323  
    `<<<`, 353  
    `<(list)`, 425  
    `|`, 54  
redundant array of independent disks (RAID), 159  
regular expressions, 56, 215, 259, 341, 352  
    anchors, 219  
    back references, 232, 259–260  
    basic, 224, 231–232, 257, 260, 269  
    extended, 224  
relational databases, 247  
relative pathnames, 9  
“release early, release often,” 369  
removing duplicate lines in a file, 55  
`REPLY` variable, 348, 425  
report generator, 315  
repositories, 151  
`return` command, 328, 338  
`RIP` (raster image processor), 288  
`rlogin` command, 182  
`rm` command, 31  
Rock Ridge extensions, 173  
`roff` command, 279  
ROT13 encoding, 255  
`rpm` command, 152  
`rsync` command, 212  
`rsync` remote-update protocol, 212  
Ruby programming language, 299

**S**

scalar variables, 415  
Schilling, Jörg, 172

`scp` command, 185  
`script` command, 76  
scripting languages, 40, 299  
`sdiff` command, 266  
searching a file for patterns, 56  
searching history, 74  
Secure Shell (SSH), 182  
`sed` command, 256, 282, 403  
`set` command, 110, 371  
setuid, 86, 337  
Seward, Julian, 204  
`sftp` command, 186  
shared libraries, 20, 151  
shebang, 311  
shell builtins, 40  
shell functions, 40, 110, 327, 385  
shell prompts, 4, 9, 75, 88, 101, 112, 139, 183, 317  
shell scripts, 309  
`SHELL` variable, 111  
shell variables, 110  
`shift` command, 383, 388  
`SIGINT` signal, 427  
signals, 426  
single quotes, 67  
Slackware, 150  
`sleep` command, 360  
soft link, 22  
`sort` command, 55, 236  
sort keys, 239  
source code, 150, 156, 235, 297  
`source` command, 118, 312  
source tree, 300  
special parameters, 385, 401  
`split` command, 266  
SSH (Secure Shell), 182  
`ssh` program, 77, 183, 209  
Stallman, Richard, xxv, xxix, 116, 225, 299  
standard error, 50  
    disposing of, 52  
    redirecting to a file, 51  
standard input, 50, 323, 348  
    redirecting, 53  
standard output, 50  
    appending to a file, 51  
    disposing of, 52

standard output (*continued*)

- redirecting standard error to, 52
  - redirecting to a file, 50
- startup files, 112
- stat command, 199
- sticky bit, 86
- storage devices, 159
  - audio CDs, 163, 172
  - CD-ROMs, 162–163, 172
  - creating filesystems, 167
  - device names, 164
  - disk partitions, 161
  - FAT32, 167
  - floppy disks, 165, 171
  - formatting, 167
  - LVM, 162
  - mount points, 161, 163
  - partitions, 167
  - reading and writing directly, 171
  - repairing filesystems, 170
  - unmounting, 163
  - USB flash drives, 171
- stream editor, 256, 282, 403
- strings
  - \${parameter:offset}, 402
  - \${parameter:offset:length}, 402
  - extract a portion of, 402
  - length of, 402
  - perform search and replace
    - upon, 403
  - remove leading portion of, 403
  - remove trailing portion of, 403
- strings command, 395
- stubs, 330, 369
  - style (program file), 302
- su command, 87
- subshells, 353, 423
- sudo command, 87–89
- Sun Microsystems, 122
- superuser, 4, 79, 88, 106
- symbolic links, 22, 33, 36
  - creating, 36, 38
  - listing, 36
- syntax errors, 363
- syntax highlighting, 310, 314

T

- tables, 247
- tabular data, 239, 278
- tail command, 56
- tape archive, 205
- tar command, 205
- tarballs, 300
- targets, 303
- Task Manager, 100
- Tatham, Simon, 186
- tbl command, 279, 282
- tee command, 57
- teletype, 96
- telnet command, 182
- TERM variable, 112
- terminal emulators, 3
- terminal sessions
  - controlling the terminal, 96
  - effect of *.bashrc*, 312
  - environment, 88
  - exiting, 6
  - login shell, 88, 112
  - with remote systems, 77
  - TERM variable, 112
  - using named pipes, 431
  - virtual, 6
- terminals, 71, 77, 142, 279
- ternary operator, 410
- test cases, 369
- test command, 336, 341, 359, 366
- test coverage, 370
- testing, 369–370
- TeX, 279
- text, 17
  - adjusting line length, 271
  - ASCII, 17
  - carriage return, 236
  - comparing, 249
  - converting MS-DOS to Unix, 254
  - counting words, 55
  - cutting, 243
  - deleting duplicate lines, 242
  - deleting multiple blank lines, 236
  - detecting differences, 250
  - displaying common lines, 249

displaying control characters, 235  
DOS format, 236  
EDITOR variable, 111  
expanding tabs, 246  
files, 17  
filtering, 55  
folding, 271  
formatting, 268  
formatting for typesetters, 279  
formatting tables, 282  
joining, 247  
linefeed character, 236  
lowercase to uppercase  
    conversion, 254  
numbering lines, 236, 268  
paginating, 274  
pasting, 246  
preparing for printing, 288  
removing duplicate lines, 55  
rendering in PostScript, 280  
ROT13 encoded, 255  
searching for patterns, 56  
sorting, 55, 236  
spell checking, 263  
substituting, 259  
substituting tabs for spaces, 246  
tab delimited, 245  
transliterating characters, 254  
Unix format, 236  
viewing with less, 17, 55  
text editors, 115, 234, 254  
    emacs, 116  
    gedit, 115, 310  
    interactive, 254  
    kate, 115, 310  
    kedit, 115  
    kwrite, 115  
    line, 122  
    nano, 115, 122  
    pico, 115  
    stream, 256  
    syntax highlighting, 310, 314  
    vi, 115  
    vim, 115, 310, 314  
    visual, 122  
for writing shell scripts, 310  
tilde expansion, 61, 65  
tload command, 106  
top command, 98  
top-down design, 326  
Torvalds, Linus, xxv  
touch command, 198–199, 213,  
    305, 389  
tr command, 254  
traceroute command, 177  
tracing, 371  
transliterating characters, 254  
traps, 427  
troff command, 279  
true command, 335  
TTY (field), 96  
type command, 40  
typesetters, 279, 287  
TZ variable, 112

## U

Ubuntu, 79, 89, 149, 222, 312  
umask command, 84, 92  
umount command, 163  
unalias command, 47  
unary operator expected (error  
    message), 366  
unary operators, 405  
unexpand command, 246  
unexpected tokens, 365  
uniq command, 55, 242  
Unix, xxvi  
Unix System V, 290  
unix2dos command, 236  
unset command, 421  
until compound command, 361  
until loop, 361  
unzip command, 210  
updatedb command, 189  
upstream providers, 151  
uptime, 326  
uptime command, 331  
USB flash drives, 159, 171  
Usenet, 255  
USER variable, 110, 112

## users

*/etc/passwd*, 79  
*/etc/shadow*, 79  
accounts, 78  
changing identity, 87  
changing passwords, 93  
effective user ID, 86, 96  
home directory, 79  
identity, 78  
password, 79  
setuid, 86  
superuser, 79, 81, 86–87, 93

## V

validating input, 353  
variables, 64, 318, 400  
    assigning values, 320, 406  
    constants, 319  
    declaring, 318, 320  
    environment, 110  
    global, 328  
    local, 329  
    names, 319, 401  
    scalar, 415  
    shell, 110  
vfat filesystem, 170  
vi command, 121  
vim command, 232, 314  
virtual consoles, 6  
virtual private network (VPN), 185  
virtual terminals, 6  
visual editors, 122  
vmstat command, 106  
VPN (virtual private network), 185

## W

wait command, 429  
wc command, 55  
web pages, 234  
wget command, 181  
What You See Is What You Get  
    (WYSIWYG), 286  
whatis command, 44  
which command, 41  
while compound command, 358  
wildcards, 26, 53, 60, 216, 221  
wodim command, 173  
word splitting, 65–67  
world, 78  
WYSIWYG (What You See Is What  
    You Get), 286

## X

X Window System, 5, 77, 185  
xargs command, 197  
xload command, 106  
xlogo command, 100  
XML (Extensible Markup  
    Language), 234

## Y

yanking text, 70  
yum command, 152

## Z

zgrep command, 232  
zip command, 209  
zless command, 45